


1.25 Gigabit Ethernet-Single Mode Transceiver



SFP, Duplex LC Connector, CWDM LD for Single Mode Fiber, RoHS Compliant

Power Budget 19dB



Features

- CWDM 8 wavelengths Transmitter
- Data Rate: 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Duplex LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25 Gbps
- Compliance with ANSI specifications for Fibre Channel applications at 1.06 Gbps
- Eye Safety
Designed to meet Laser Class 1 comply with EN60825-1

Applications

- CWDM
- Gigabit Ethernet Links
- Fibre Channel Links at 1.06 Gbps
- High Speed Backplane Interconnects
- Switched Backbones

Description

The CT-1250TSP-CB6L series from Coretek Opto Corp. are the high performance and cost-effective modules for serial optical data communication applications specified for single mode of 1.25 Gb/s. It operates with +3.3V power supply. The module is intended for single mode fiber, operates at a nominal wavelength of CWDM and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module consists of a transmitter optical subassembly, a receiver optical subassembly and an electrical subassembly. All of them are housed in a metal package and the combination produces a reliable component.

The module is a duplex LC connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE-802.3z compliant link for 1.25Gb/s long reach applications. The characteristics are performed in accordance with ITU-T G.694.2 and G.695.

EMC

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

Eye Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.

1.25 Gigabit Ethernet-Single Mode Transceiver



Product Information

| Model Number | Wavelength | Latch Color | Operating Voltage & SD Output | Distance | Output Power | Sensitivity |
|-----------------|------------|-------------|-------------------------------|----------|--------------|-------------|
| CT-1250TSP-CB6L | 1470 nm | Gray | 3.3V TTL AC/AC | 40 km | -5 ~ 0 dBm | ≤ -24 dBm |
| | 1490 nm | Violet | | | | |
| | 1510 nm | Blue | | | | |
| | 1530 nm | Green | | | | |
| | 1550 nm | Yellow | | | | |
| | 1570 nm | Orange | | | | |
| | 1590 nm | Red | | | | |
| | 1610 nm | Brown | | | | |

ABSOLUTE MAX RATINGS

| PARAMETER | SYMBOL | MIN | MAX | UNIT | NOTE |
|---------------------|-----------------|-----|-----------------|------|------|
| Storage Temperature | T _S | -40 | 85 | °C | |
| Supply Voltage | V _{CC} | 0 | 6 | V | |
| Data Input Voltage | --- | 0 | V _{CC} | V | |
| Supply Current | I _S | | 300 | mA | |

OPERATING CONDITIONS

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------------|-----------------|------|------|------|------|------|
| Case Operating Temperature | T _A | 0 | | 70 | °C | |
| Supply Voltage | V _{CC} | 3.1 | | 3.5 | V | |
| Data Input Voltage Swing | V _{ID} | 300 | | 1860 | mV | |

ELECTRICAL CHARACTERISTICS

| PARAMETER | SYMBOL | MIN | MAX | UNIT | NOTE |
|---|-------------------|-----------------------|-----------------------|------|------|
| Transmitter | | | | | |
| Transmitter Supply Current | I _{CC} T | | 200 | mA | |
| Tx_ Disable Input Voltage - Low | V _{IL} | 0 | 0.8 | V | |
| Tx_ Disable Input Voltage - High | V _{IH} | 2.0 | V _{CC} | V | |
| Tx_ Fault Output Voltage - Low | V _{OL} | 0 | 0.8 | V | |
| Tx_ Fault Output Voltage - High | V _{OH} | 2.0 | V _{CC} | V | |
| Receiver | | | | | |
| Receiver Supply Current | I _{CC} R | | 100 | mA | |
| Receiver Data Output Differential Voltage | V _{OD} | 0.4 | 1.3 | V | |
| Rx_LOS Output Voltage - Low | V _{OL} | 0 | 0.8 | V | |
| Rx_LOS Output Voltage - High | V _{OH} | 2.0 | V _{CC} | V | |
| MOD_DEF (1) , MOD_DEF (2) - Low | V _{IL} | -0.6 | V _{CC} × 0.3 | V | |
| MOD_DEF (1) , MOD_DEF (2) - High | V _{IH} | V _{CC} × 0.7 | V _{CC} + 0.5 | V | |

1.25 Gigabit Ethernet-Single Mode Transceiver



TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTE |
|-----------------------------|--------------------------------|--------|------|--------|-------|------|
| Optical Output Power | P _o | -5 | | 0 | dBm | 1 |
| Extinction Ratio | ER | 9 | | | dB | |
| Center Wavelength | λ_c | 1464.5 | 1470 | 1477.5 | nm | |
| | | 1484.5 | 1490 | 1497.5 | | |
| | | 1504.5 | 1510 | 1517.5 | | |
| | | 1524.5 | 1530 | 1537.5 | | |
| | | 1544.5 | 1550 | 1557.5 | | |
| | | 1564.5 | 1570 | 1577.5 | | |
| | | 1584.5 | 1590 | 1597.5 | | |
| | | 1604.5 | 1610 | 1617.5 | | |
| Spectral Width (-20dB) | $\Delta \lambda$ | | | 1 | nm | |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB | |
| RIN | RIN | | | -120 | dB/Hz | |
| Optical Rise time (20%-80%) | t _r | | | 260 | ps | 2 |
| Optical Fall time (20%-80%) | t _f | | | 260 | ps | 2 |
| Output Eye | Compliant with IEEE802.3z/D5.0 | | | | | |

RECEIVER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTE |
|--|--------------------------------|------|------|------|------|------|
| Maximum Input Optical Power | P _{max} | -3 | | | dBm | 3 |
| Minimum Input Optical Power | P _{min} | | | -24 | dBm | 3 |
| Operating Wavelength | λ | 1260 | | 1620 | nm | |
| Optical Return Loss | ORL | 12 | | | dB | |
| Receiver Electrical 3dB Upper Cutoff Frequency | --- | | | 1500 | MHz | |
| LOS of Signal - Asserted | P _A | -35 | | | dBm | |
| LOS of Signal - Deasserted | P _D | | | -24 | dBm | |
| Loss of Signal -Hysteresis | P _D -P _A | 0.5 | | | dB | |

Notes:

1. Measured average power coupled into 9/125 μ m single mode fiber.
2. These are 20-80% values.
3. Measured with 2⁷-1 PRBS at BER<10⁻¹²


TIMING CHARACTERISTICS

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTE |
|---|-----------------------|-----|------|-----|---------|------|
| TX_DISABLE Assert Time | t _{off} | | | 10 | μ s | |
| TX_DISABLE Negate Time | t _{on} | | | 1 | ms | |
| Time to initialize, include reset of TX_FAULT | t _{init} | | | 300 | ms | |
| TX_FAULT from fault to assertion | t _{fault} | | | 100 | μ s | |
| TX_DISABLE time to start reset | t _{reset} | 10 | | | μ s | |
| Receiver Loss of Signal Assert Time (off to on) | t _{A,RX_LOS} | | | 100 | μ s | |
| Receiver Loss of Signal Assert Time (on to off) | t _{D,RX_LOS} | | | 100 | μ s | |


1.25 Gigabit Ethernet-Single Mode Transceiver




BLOCK DIAGRAM OF TRANSCEIVER

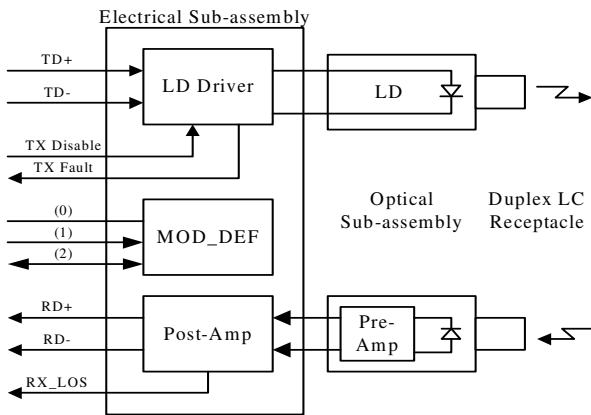

PIN OUT DIAGRAM OF TRANSCEIVER

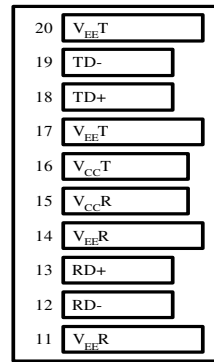

Top of Board

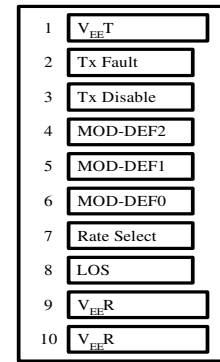

Bottom of Board (As Viewed through Top of Board)


PIN OUT TABLE

| Pin | Symbol | Functional Description |
|-----|-------------|---|
| 1 | VeeT | Transmitter Ground |
| 2 | TX Fault | Transmitter Fault Indication |
| 3 | TX Disable | Transmitter Disable – Module disables on high or open |
| 4 | MOD-DEF(2) | Module Definition 2 – Two wire serial ID interface |
| 5 | MOD-DEF(1) | Module Definition 1 – Two wire serial ID interface |
| 6 | MOD-DEF(0) | Module Definition 0 – Grounded in module |
| 7 | Rate Select | Not Connected |
| 8 | LOS | Loss of Signal |
| 9 | VeeR | Receiver Ground |
| 10 | VeeR | Receiver Ground |
| 11 | VeeR | Receiver Ground |
| 12 | RD- | Inverse Received Data Out |
| 13 | RD+ | Received Data Out |
| 14 | VeeR | Receiver Ground |
| 15 | VccR | Receiver Power |
| 16 | VccT | Transmitter Power |
| 17 | VeeT | Transmitter Ground |
| 18 | TD+ | Transmitter Data In |
| 19 | TD- | Inverse Transmitter Data In |
| 20 | VeeT | Transmitter Ground |

1.25 Gigabit Ethernet-Single Mode Transceiver




RECOMMENDED CIRCUIT SCHEMATIC

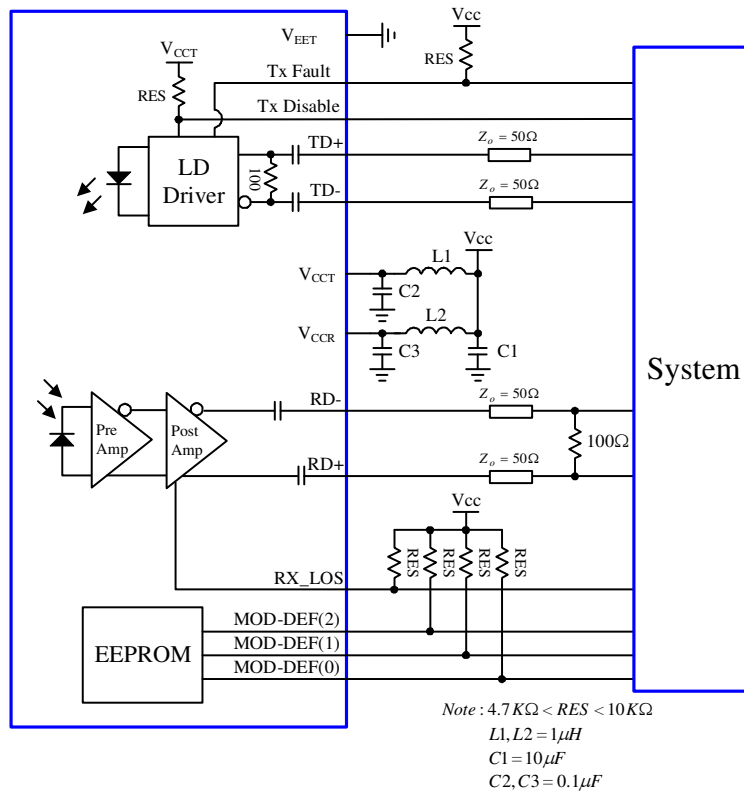

MECHANICAL DIMENSIONS

Units in mm

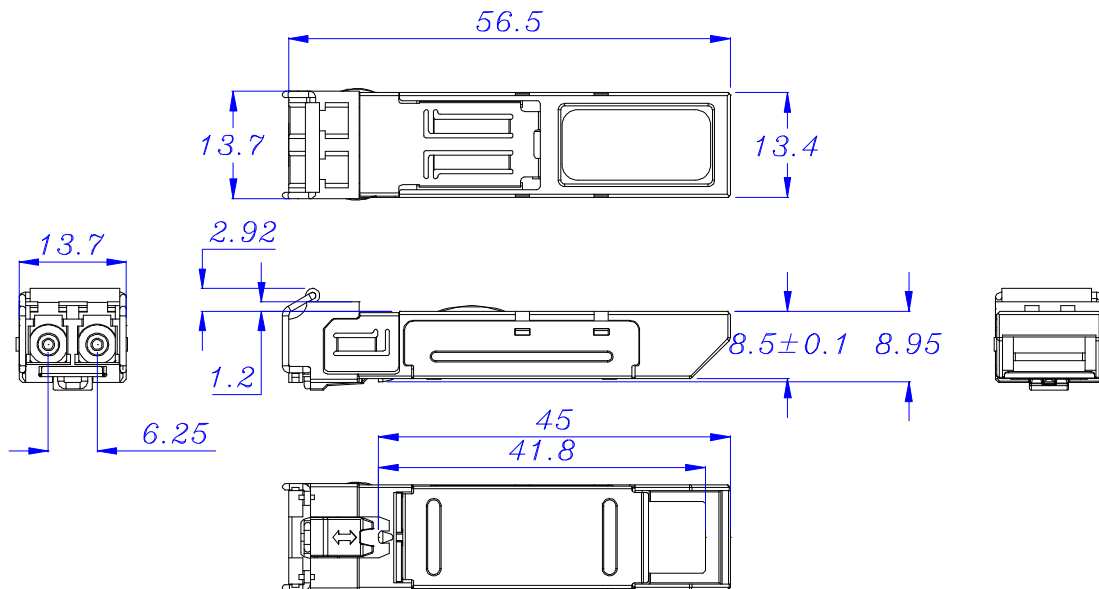

All dimensions are $\pm 0.2\text{mm}$ unless otherwise specified.

Claim:

CORETEK Opto Corp. reserves the right to make changes in the specification described hereinafter without prior notice.