

# 622Mbps ATM-Single Mode Transceiver



SFP, Duplex LC Connector, 1310nm FP LD for Single Mode Fiber, RoHS Compliant

Extended Operating Temperature from  $-40$  to  $+85$  °C



## Features

- 1310nm FP LD
- Data Rate: 622Mbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Duplex LC Connector
- Compliance with ATM Standard
- Eye Safety  
Designed to meet Laser Class 1 comply with EN60825-1

## Applications

- ATM/SONET OC-12/SDH STM-4
- Single mode fiber links
- Optical-Electrical Interface Conversion

## Description

The CT-0622TSP-MB5L-A from Coretek Opto Corp. is the high performance and cost-effective module for serial optical data communication applications specified for single mode of 622 Mb/s. It operates with +3.3V power supply. The module is intended for single mode fiber, operates at a nominal wavelength of 1310nm and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module consists of a transmitter optical subassembly, a receiver optical subassembly and an electrical subassembly. All of them are housed in a metal package and the combination produces a reliable component.

The module is a duplex LC connector transceiver designed to provide an ATM/SONET OC-12/SDH STM-4 compliant link for 622 Mb/s intermediate reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE.

## EMC

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

## Eye Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.

# 622Mbps ATM-Single Mode Transceiver



## Product Information

| Model Number      | Operating Voltage & SD Output | Distance | LD Type & Wavelength | Output Power | Sensitivity    |
|-------------------|-------------------------------|----------|----------------------|--------------|----------------|
| CT-0622TSP-MB5L-A | 3.3V TTL AC/AC                | 15 km    | 1310 nm FP           | -15 ~ -8 dBm | $\leq -28$ dBm |

## ABSOLUTE MAX RATINGS

| PARAMETER           | SYMBOL   | MIN | MAX      | UNIT               | NOTE |
|---------------------|----------|-----|----------|--------------------|------|
| Storage Temperature | $T_S$    | -40 | 85       | $^{\circ}\text{C}$ |      |
| Supply Voltage      | $V_{CC}$ | 0   | 6        | V                  |      |
| Data Input Voltage  | ---      | 0   | $V_{CC}$ | V                  |      |

## OPERATING CONDITIONS

| PARAMETER                  | SYMBOL   | MIN. | TYP. | MAX. | UNIT               | NOTE |
|----------------------------|----------|------|------|------|--------------------|------|
| Case Operating Temperature | $T_A$    | -40  |      | 85   | $^{\circ}\text{C}$ |      |
| Supply Voltage             | $V_{CC}$ | 3.1  |      | 3.5  | V                  |      |
| Data Input Voltage Swing   | $V_{ID}$ | 400  |      | 1660 | mV                 |      |

## ELECTRICAL CHARACTERISTICS

| PARAMETER                                 | SYMBOL    | MIN                 | MAX                 | UNIT | NOTE |
|---|-----------|---------------------|---------------------|------|------|
| <b>Transmitter</b>                        |           |                     |                     |      |      |
| Transmitter Supply Current                | $I_{CCT}$ |                     | 200                 | mA   |      |
| Tx_Disable Input Voltage - Low            | $V_{IL}$  | 0                   | 0.8                 | V    |      |
| Tx_Disable Input Voltage - High           | $V_{IH}$  | 2.0                 | $V_{CC}$            | V    |      |
| Tx_Fault Output Voltage - Low             | $V_{OL}$  | 0                   | 0.8                 | V    |      |
| Tx_Fault Output Voltage - High            | $V_{OH}$  | 2.0                 | $V_{CC}$            | V    |      |
| <b>Receiver</b>                           |           |                     |                     |      |      |
| Receiver Supply Current                   | $I_{CCR}$ |                     | 100                 | mA   |      |
| Receiver Data Output Differential Voltage | $V_{OD}$  | 0.4                 | 1.3                 | V    |      |
| Rx_LOS Output Voltage - Low               | $V_{OL}$  | 0                   | 0.8                 | V    |      |
| Rx_LOS Output Voltage - High              | $V_{OH}$  | 2.0                 | $V_{CC}$            | V    |      |
| MOD_DEF (1) , MOD_DEF (2) - Low           | $V_{IL}$  | -0.6                | $V_{CC} \times 0.3$ | V    |      |
| MOD_DEF (1) , MOD_DEF (2) - High          | $V_{IH}$  | $V_{CC} \times 0.7$ | $V_{CC} + 0.5$      | V    |      |

## TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER                   | SYMBOL           | MIN  | TYP. | MAX  | UNIT | NOTE                                    |
|-----------------------------|------------------|------|------|------|------|---|
| Optical Output Power        | $P_o$            | -15  |      | -8   | dBm  | 1                                       |
| Extinction Ratio            | ER               | 8.2  |      |      | dB   |   |
| Center Wavelength           | $\lambda_c$      | 1275 | 1310 | 1355 | nm   |   |
| Spectral Width (RMS)        | $\Delta \lambda$ |      |      | 2.5  | nm   |   |
| Optical Rise time (20%-80%) | $t_r$            |      |      | 1.2  | ns   | 2                                       |
| Optical Fall time (20%-80%) | $t_f$            |      |      | 1.2  | ns   | 2                                       |
| Output Eye                  |                  |      |      |      |      | Compliant with ITU recommendation G.957 |

# 622Mbps ATM-Single Mode Transceiver



## RECEIVER ELECTRO-OPTICAL CHARACTERISTICS

| PARAMETER                   | SYMBOL      | MIN  | TYP. | MAX  | UNIT | NOTE |
|-----------------------------|-------------|------|------|------|------|------|
| Maximum Input Optical Power | $P_{max}$   | -3   |      |      | dBm  | 3    |
| Receiver Sensitivity        | $P_{min}$   |      |      | -28  | dBm  | 3    |
| Operating Wavelength        | $\lambda$   | 1100 |      | 1600 | nm   |      |
| Loss of Signal - Asserted   | $P_A$       | -42  |      |      | dBm  |      |
| Loss of Signal - Deasserted | $P_D$       |      |      | -27  | dBm  |      |
| Loss of Signal -Hysterisis  | $P_D - P_A$ | 0.5  |      |      | dB   |      |


### Notes:

1. Measured average power coupled into 9/125  $\mu$  m single mode fiber.
2. These are 20-80% values.
3. Measured with  $2^{23}-1$  PRBS at BER< $10^{-10}$

## TIMING CHARACTERISTICS

| PARAMETER                                       | SYMBOL          | MIN | TYP. | MAX | UNIT    | NOTE |
|---|-----------------|-----|------|-----|---------|------|
| TX_DISABLE Assert Time                          | $t_{off}$       |     |      | 10  | $\mu$ s |      |
| TX_DISABLE Negate Time                          | $t_{on}$        |     |      | 1   | ms      |      |
| Time to initialize, include reset of TX_FAULT   | $t_{init}$      |     |      | 300 | ms      |      |
| TX_FAULT from fault to assertion                | $t_{fault}$     |     |      | 100 | $\mu$ s |      |
| TX_DISABLE time to start reset                  | $t_{reset}$     | 10  |      |     | $\mu$ s |      |
| Receiver Loss of Signal Assert Time (off to on) | $t_{A,RX\_LOS}$ |     |      | 100 | $\mu$ s |      |
| Receiver Loss of Signal Assert Time (on to off) | $t_{D,RX\_LOS}$ |     |      | 100 | $\mu$ s |      |


## BLOCK DIAGRAM OF TRANSCEIVER

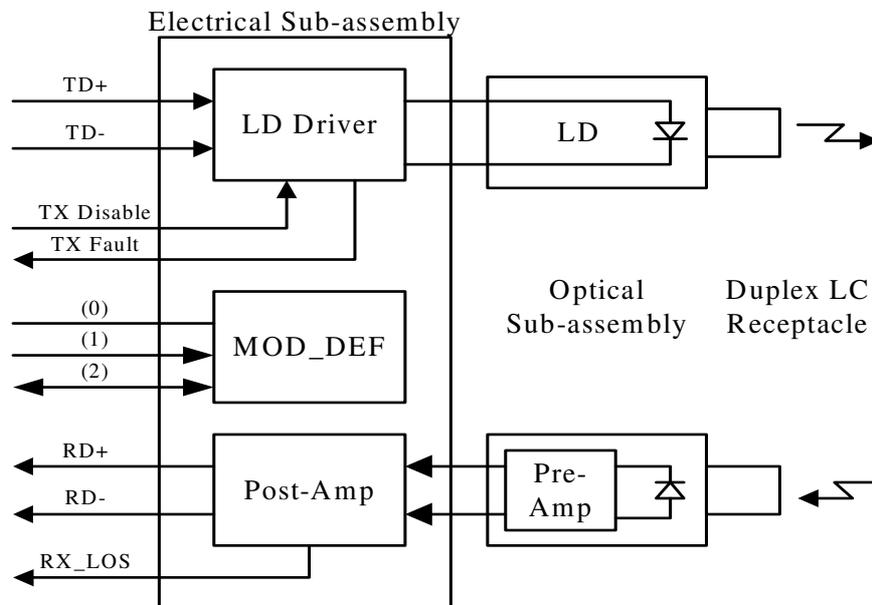


# 622Mbps ATM-Single Mode Transceiver



## PIN OUT DIAGRAM OF TRANSCEIVER

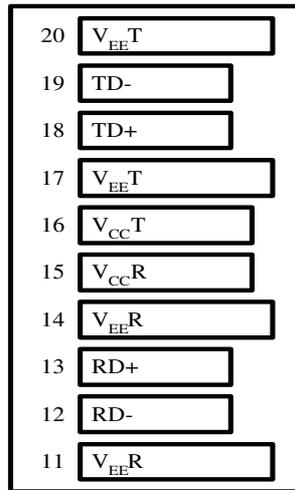

Top of Board

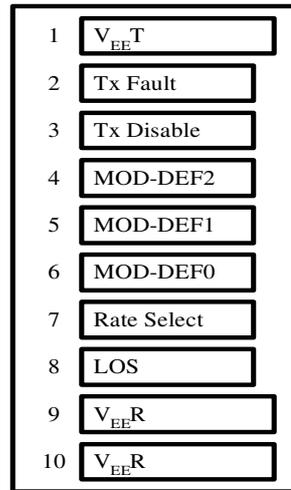

Bottom of Board (As Viewed through Top of Board)


## PIN OUT TABLE

| Pin | Symbol      | Functional Description                                |
|-----|-------------|---|
| 1   | VeeT        | Transmitter Ground                                    |
| 2   | TX Fault    | Transmitter Fault Indication                          |
| 3   | TX Disable  | Transmitter Disable – Module disables on high or open |
| 4   | MOD-DEF(2)  | Module Definition 2 – Two wire serial ID interface    |
| 5   | MOD-DEF(1)  | Module Definition 1 – Two wire serial ID interface    |
| 6   | MOD-DEF(0)  | Module Definition 0 – Grounded in module              |
| 7   | Rate Select | Not Connected   |
| 8   | LOS         | Loss of Signal  |
| 9   | VeeR        | Receiver Ground                                       |
| 10  | VeeR        | Receiver Ground                                       |
| 11  | VeeR        | Receiver Ground                                       |
| 12  | RD-         | Inverse Received Data Out                             |
| 13  | RD+         | Received Data Out                                     |
| 14  | VeeR        | Receiver Ground                                       |
| 15  | VccR        | Receiver Power  |
| 16  | VccT        | Transmitter Power                                     |
| 17  | VeeT        | Transmitter Ground                                    |
| 18  | TD+         | Transmitter Data In                                   |
| 19  | TD-         | Inverse Transmitter Data In                           |
| 20  | VeeT        | Transmitter Ground                                    |

# 622Mbps ATM-Single Mode Transceiver




## RECOMMENDED CIRCUIT SCHEMATIC

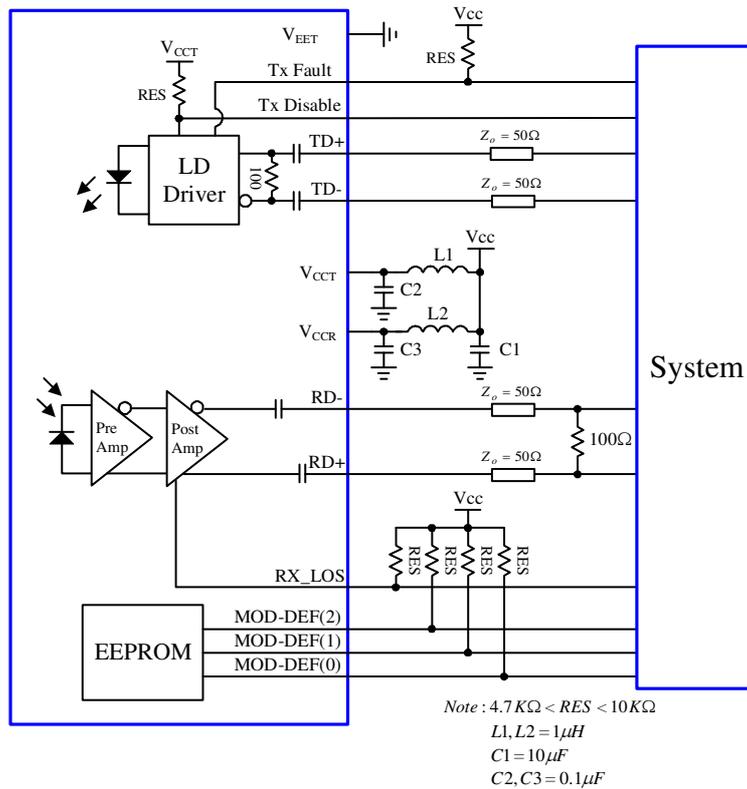

## MECHANICAL DIMENSIONS

Units in mm

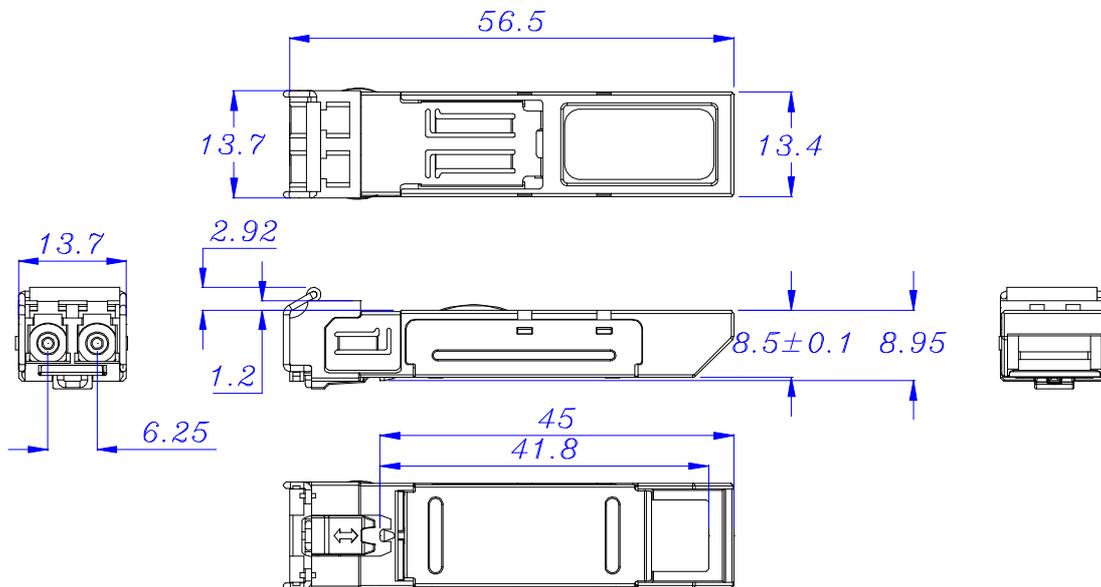

All dimensions are  $\pm 0.2\text{mm}$  unless otherwise specified.

### Claim:

CORETEK Opto Corp. reserves the right to make changes in the specification described hereinafter without prior notice.